PROJECTION | ORIGINAL DRAWING SIZE A1

INSTALLATION

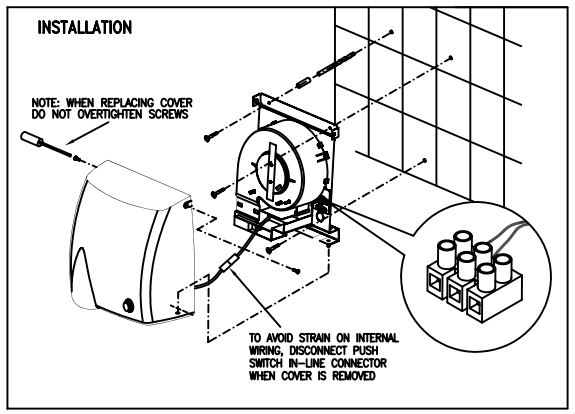

SERVICE CLEANING

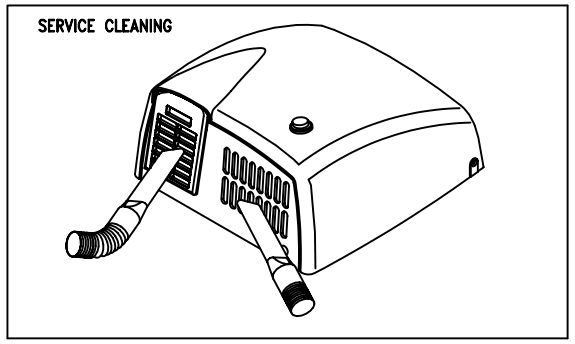

NL1BHM 1.75kW MANUAL HAND DRYER

Newlec

INSTALLATION INSTRUCTIONS

ALWAYS ENSURE THAT THE INSTALLATION CONFORMS TO THE CURRENT EDITION OF THE IEE WIRING REGULATIONS, BS7671(UK) OR THE APPROPRIATE STANDARDS IN YOU COUNTRY.
ENSURE THAT THE UNIT IS SEPARATELY FUSED WITH A SUITABLY RATED FUSE AND THAT IT IS CONNECTED TO TO THE SUPPLY WITH A DOUBLE POLE ISOLATING SWITCH HAVING A CONTACT SEPARATION OF AT LEAST 3mm.
CARE SHOULD BE TAKEN THAT SINGLE INSULATED CONDUCTORS CANNOT COME INTO CONTACT WITH THE MOUNTING SURFACE.

MOUNTING INSTRUCTIONS

UNIT MUST BE FIXED TO A SOLID SUPPORTING WALL. SEE OVERLEAF FOR MOUNTING HOLE TEMPLATE.
RECOMMENDED FIXING HEIGHTS TO TOP OF UNIT ARE AS FOLLOWS:-
a) 1.5 METRES ABOVE FLOOR FOR NORMAL USE
b) 1.5 METRES ABOVE FLOOR WHERE AVERAGE AGE OF USER IS BELOW 16 YEARS
c) 1.0 MINIMUM DISTANCE ABOVE SHELVES, SINKS OR RADIATORS
TO ENSURE EASE OF INSTALLATION AND SUBSEQUENT MAINTENANCE, THE HORIZONTAL DISTANCE TO ANY ADJACENT WALL SHOULD NOT BE LESS THAT 0.2 METRES

AFTER INSTALLATION OR SERVICING, UNITS MUST BE CHECKED, AND ONLY LEFT WHEN ELECTRICALLY AND MECHANICALLY SAFE.

When ordering replacement modules always quote SERIAL NO., MODEL/SERIES, ELECTRICAL SUPPLY VOLTAGE AND FREQUENCY.

SERVICING THE HAND DRYER

THE MINIMUM SERVICE PERIOD FOR THE DRYER SHOULD BE EVERY 3 MONTHS OR MORE FREQUENT INTERVALS AS EXPERIENCE DICTATES
ISOLATE THE UNIT FROM THE ELECTRICITY SUPPLY BEFORE SERVICING. REMOVE DUST, FLUFF AND ANY OTHER BUILD UP OF FOREIGN MATTER FROM INLET AND OUTLET GRILLE AREAS

Guarantee
The hand dryer is Guaranteed for two years from the date of purchase against faulty materials or workmanship.
In the event of any part being found to be defective, the hand dryer will be repaired, or at the Manufacturers option replaced, without charge, provided that the hand dryer:
a) has been installed and used in accordance with the instructions given with each unit.
b) has not been connected to an unsuitable electrical supply. (Correct electricity supply requirements are stated on the units rating label).
c) has not been subjected to mis-use, neglect or damage.
d) has been properly serviced in accordance with the instructions given with each unit.
e) has not been modified or repaired by any person not authorised by the Manufacturer.
This guarantee excludes labour after an initial 12 month period.

THIS UNIT MUST ONLY BE FITTED BY SUITABLY QUALIFIED PERSONNEL.

452921H

FAULT DIAGNOSIS CHART

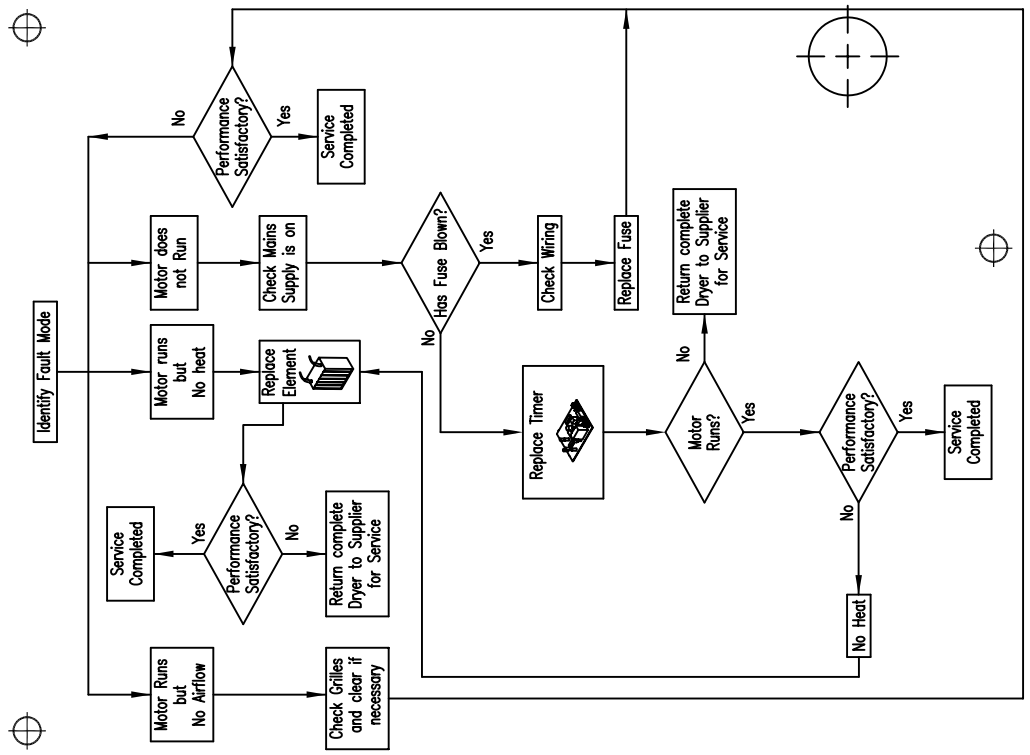

ISS	MOD	DATE	CHK'D
H	1894	26.10.04	S.R.A.
G	Y217	5.4.01	S.R.A.
F	Y160A	13-2-01	SRA
E	X586	1/9/99	P.L.H
D	X574	10/6/99	P.L.H
C	X484	23/3/99	P.L.H.
B	X333	5/11/98	G.E.P.
A	X200	29/10/98	P.L.H.

This drawing/document is COPYRIGHT and the property of VENT-AXIA Ltd.
It must not be copied (in whole or in part), used for manufacture or otherwise disclosed without prior written consent of the company.
Any copies of this drawing/document made by any method must also include a copy of this legend.
© VENT-AXIA Ltd. 1998

GENERAL TOLERANCE UNLESS STATED:-	mm	DRAWN P.WHITEHOUSE	DATE	CHK'D P.L.H.	DATE 29/10/98 SCALE 1:1
GENERAL WALL THICKNESS UNLESS STATED:-	mm	MATERIAL -			
INTERNAL EDGES AND CORNERS TO BE BROKEN:-	mm	FINISH -			
EXTERNAL EDGES AND CORNERS TO BE BROKEN:-	mm	PRODUCT BUDGET HD		TITLE ARTWORK FOR BUDGET SERIES PUSHBUTTON HD (NEWLEC)	
GENERAL DRAFT ANGLE UNLESS STATED:-	°	Vent-Axia CRAWLEY, SUSSEX.		DRG 452921_1	H
UNDIMENSIONED RADII TO BE:-	mm				